

1

2

3

4

5

6

A

B

C

D


A

B

C

D

TO ADJUST ROLLER. USE SMALL FLAT BLADE SCREWDRIVER AND REMOVE LOCKING SETSCREW. RE-INSERT FLAT BLADED SCREWDRIVER AND ADJUST INTERNAL SET SCREW TO DESIRED TENSION ON ROLLER. TEST DOOR CLOSING UNTIL SATISFIED. FIT LOCKING SET SCREW AND TIGHTEN. CAUTION! - LOCKING SET SCREW MUST BE FITTED TO PREVENT ADJUSTING SETSCREW FROM MOVING DURING OPEN/CLOSE CYCLE OF THE DOOR.

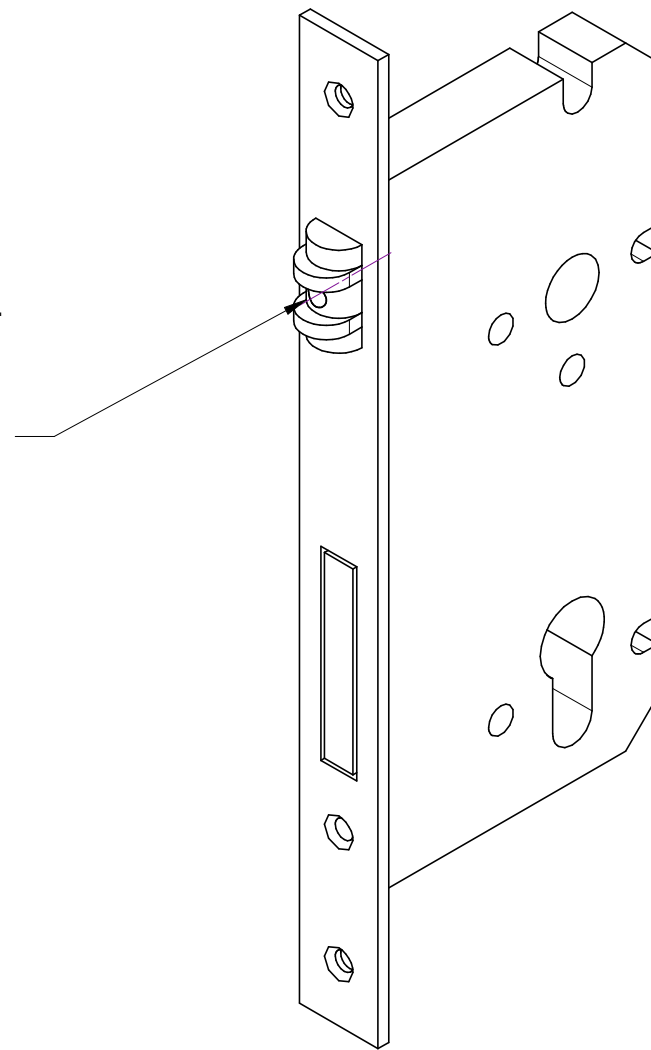

<p><i>MILES NELSON</i></p> <p>228 KITCHENER RD MILFORD, AUCKLAND, NEW ZEALAND. PH: 64 9 489 7225 FAX: 64 9 489 5552</p>		TITLE	
		<p><b>728 ROLLER LOCK ADJUSTMENT INSTRUCTIONS</b></p>	
<p>THIS DESIGN AND DRAWING IS THE COPYRIGHT OF MILES NELSON MANUFACTURING CO LTD AND IS NOT TO BE REPRODUCED WITHOUT WRITTEN PERMISSION</p>		DO NOT SCALE IF IN DOUBT ASK	SCALE
		DRAWING NO.	DRAWN BY
		SHT__OF__	APPROVED BY
			DATE 8th April 2008