

8626 RACK & PINION DOOR CLOSER

WITH SLIDE ARM - EN POWER 2 - 4



1. Slide Arm

Aluminium slide arm track. Has pre-drilled holes to suit pull or push side mounting.

2. Hold Open

Adjustable hold open feature. Can be positioned according to door angle requirement. Easily removed for fire doors.

3. Closer Arm

Solid steel arm suits both inward and outward direction doors. Designed for use on left or right hung doors.

4. Magnetic Cover

Magnetic cover trim plate for ease of use and clean aesthetic.

5. Hydraulic Fluid

Adjustable valves to control the closing speed, latching speed, backcheck, and delayed action.

6. EN Power 2-4

Spring adjustment to set door power to suit environmental conditions.

7. Rack & Pinion

Rack and pinion mechanism.

8. Installation

Can fit into 30mm gap between top of door and ceiling.

Available Finishes

Stainless Steel



Matt Black




10 YEAR MECHANICAL WARRANTY

FIRE RATED*

HIGH DURABILITY

500K CYCLES

*Check website for details

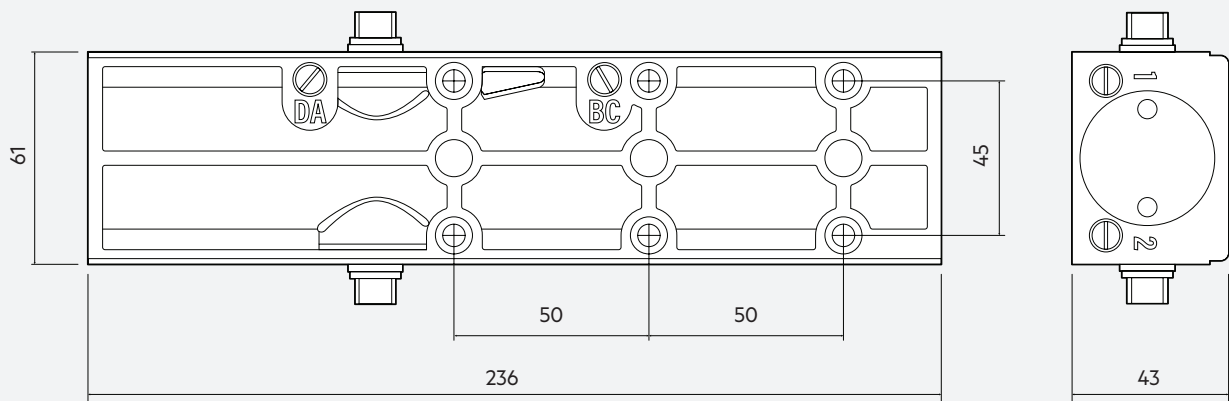

Product Details

Code

MNC8626SABC/DA
MNC8626SABC/DA-BLK

Finish

Satin Chrome
Matt Black

Accessories (page 24 - 25)

Description

MNC8000DP	Drop plate
MNC8626PR	Packer - Satin Chrome
MNC8626PR-BLK	Packer - Matt Black
MNCD002	Double door selector

Model	Power	Fire Rated	Adjustable Closing Speed	Adjustable Latching Speed	Backcheck	Delayed Action	Opening Angle Push	Opening Angle Pull	Max. Door Weight (kg)	Max. Door Width (mm)
MNC8626SABC/DA	EN2-4	✓	✓	✓	✓	✓	105°	120°	15-100	750-1100