
9625 CAM ACTION DOOR CLOSER
WITH SLIDE ARM - EN POWER 2 - 6

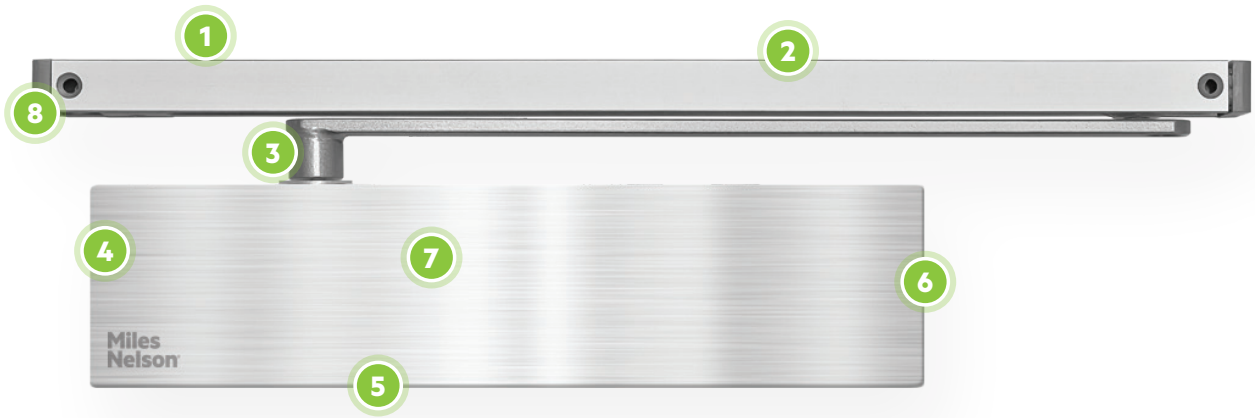

1. Slide Arm Track

Aluminium track. Has pre-drilled holes to suit pull or push side mounting.

2. Hold Open

Adjustable hold open feature. Can be positioned according to door angle requirement. Easily removed for fire doors.

3. Closer Arm

Supplied with alternative arms to suit either pull or push side installation. Works for both left and right hung doors.

4. Cover

Stainless box cover. Secure top side screw fixing.

5. Hydraulic Fluid

Adjustable valves to control the closing speed, latching speed, backcheck, and delayed closing.

6. EN Power 2-6

Spring adjustment to set door power to suit environmental conditions.

7. Cam Action

Roller and cam mechanism aids ease of use while maintaining power.

8. Installation

Can fit into 35mm gap between top of door and ceiling.

10 YEAR MECHANICAL WARRANTY

HIGH DURABILITY

500K CYCLES


Available Finishes

Stainless Steel



Matt Black



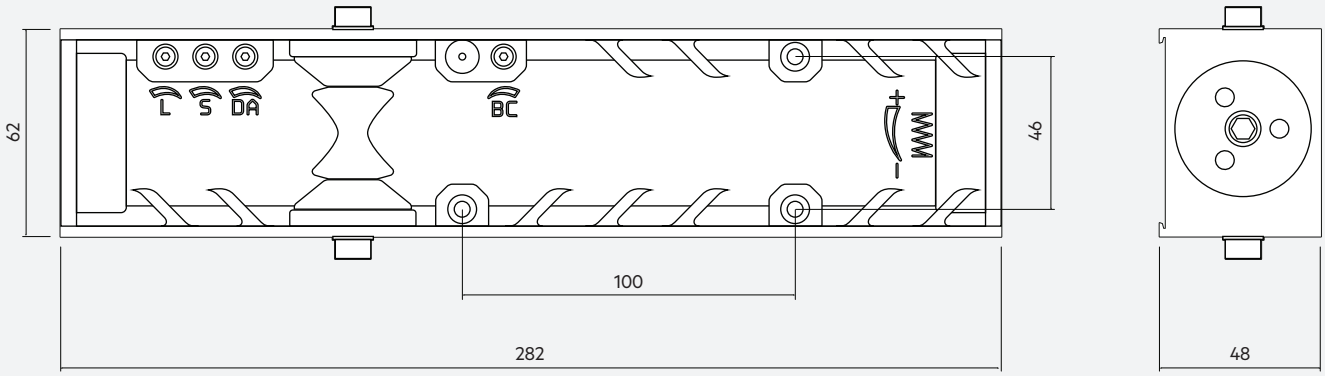

Product Details

Code	Finish
MNC9625CA	Satin Chrome
MNC9625CA-BLK	Matt Black

Accessories (page 24 - 25)	Description
MNC9625DP	Drop plate or packer - Satin Chrome
MNC9625DP-BLK	Drop plate or packer - Matt Black
MNCD002	Double door selector

Model	Power	Fire Rated	Adjustable Closing Speed	Adjustable Latching Speed	Backcheck	Delayed Action	Opening Angle Push	Opening Angle Pull	Max. Door Weight (kg)	Max. Door Width (mm)
MNC9625CA	EN2-6	✓	✓	✓	✓	✓	120°	170°	40-120	850-1400