
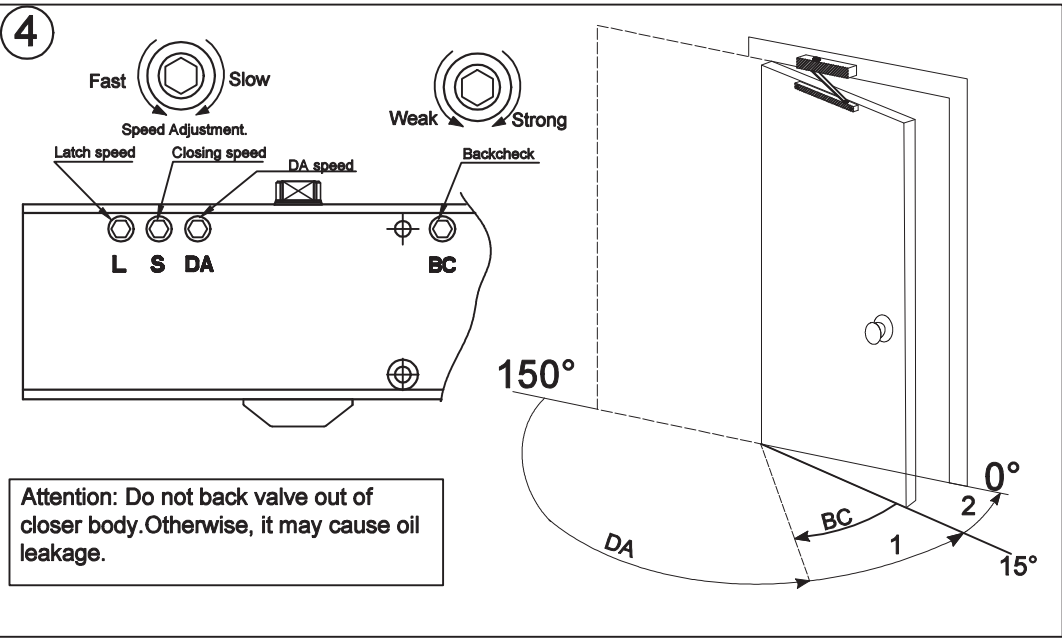
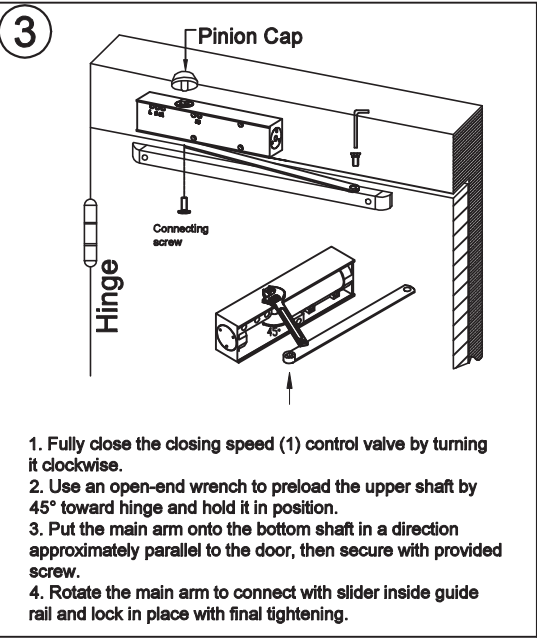
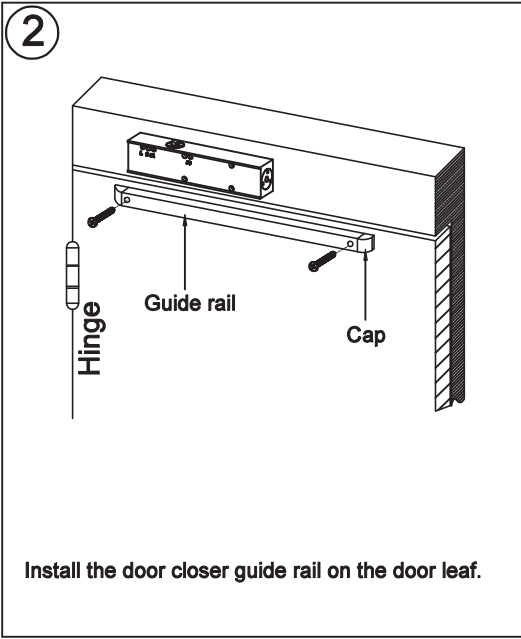
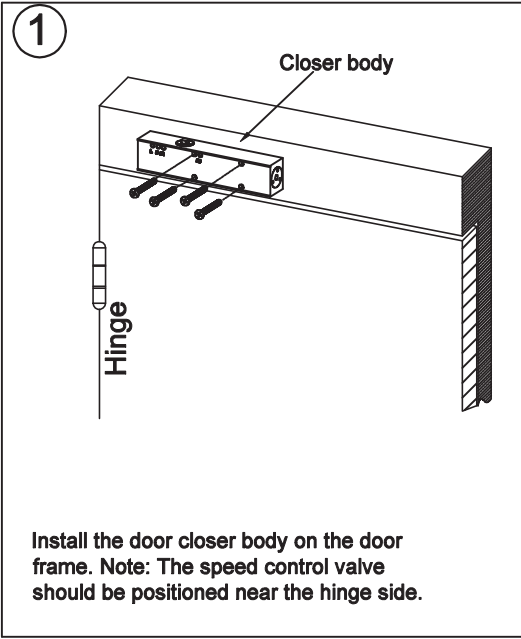


XXW-MNC-DC1500BCDA-G-[420X297]-正-K-26-03-24


Transom mount | Pull side |Type G
Left hand door illustrated
Same dimensions apply to right hand door.

DC1500BCDA (MNC9000) G CAM ACTION
DOOR CLOSER INSTALLATION INSTRUCTION

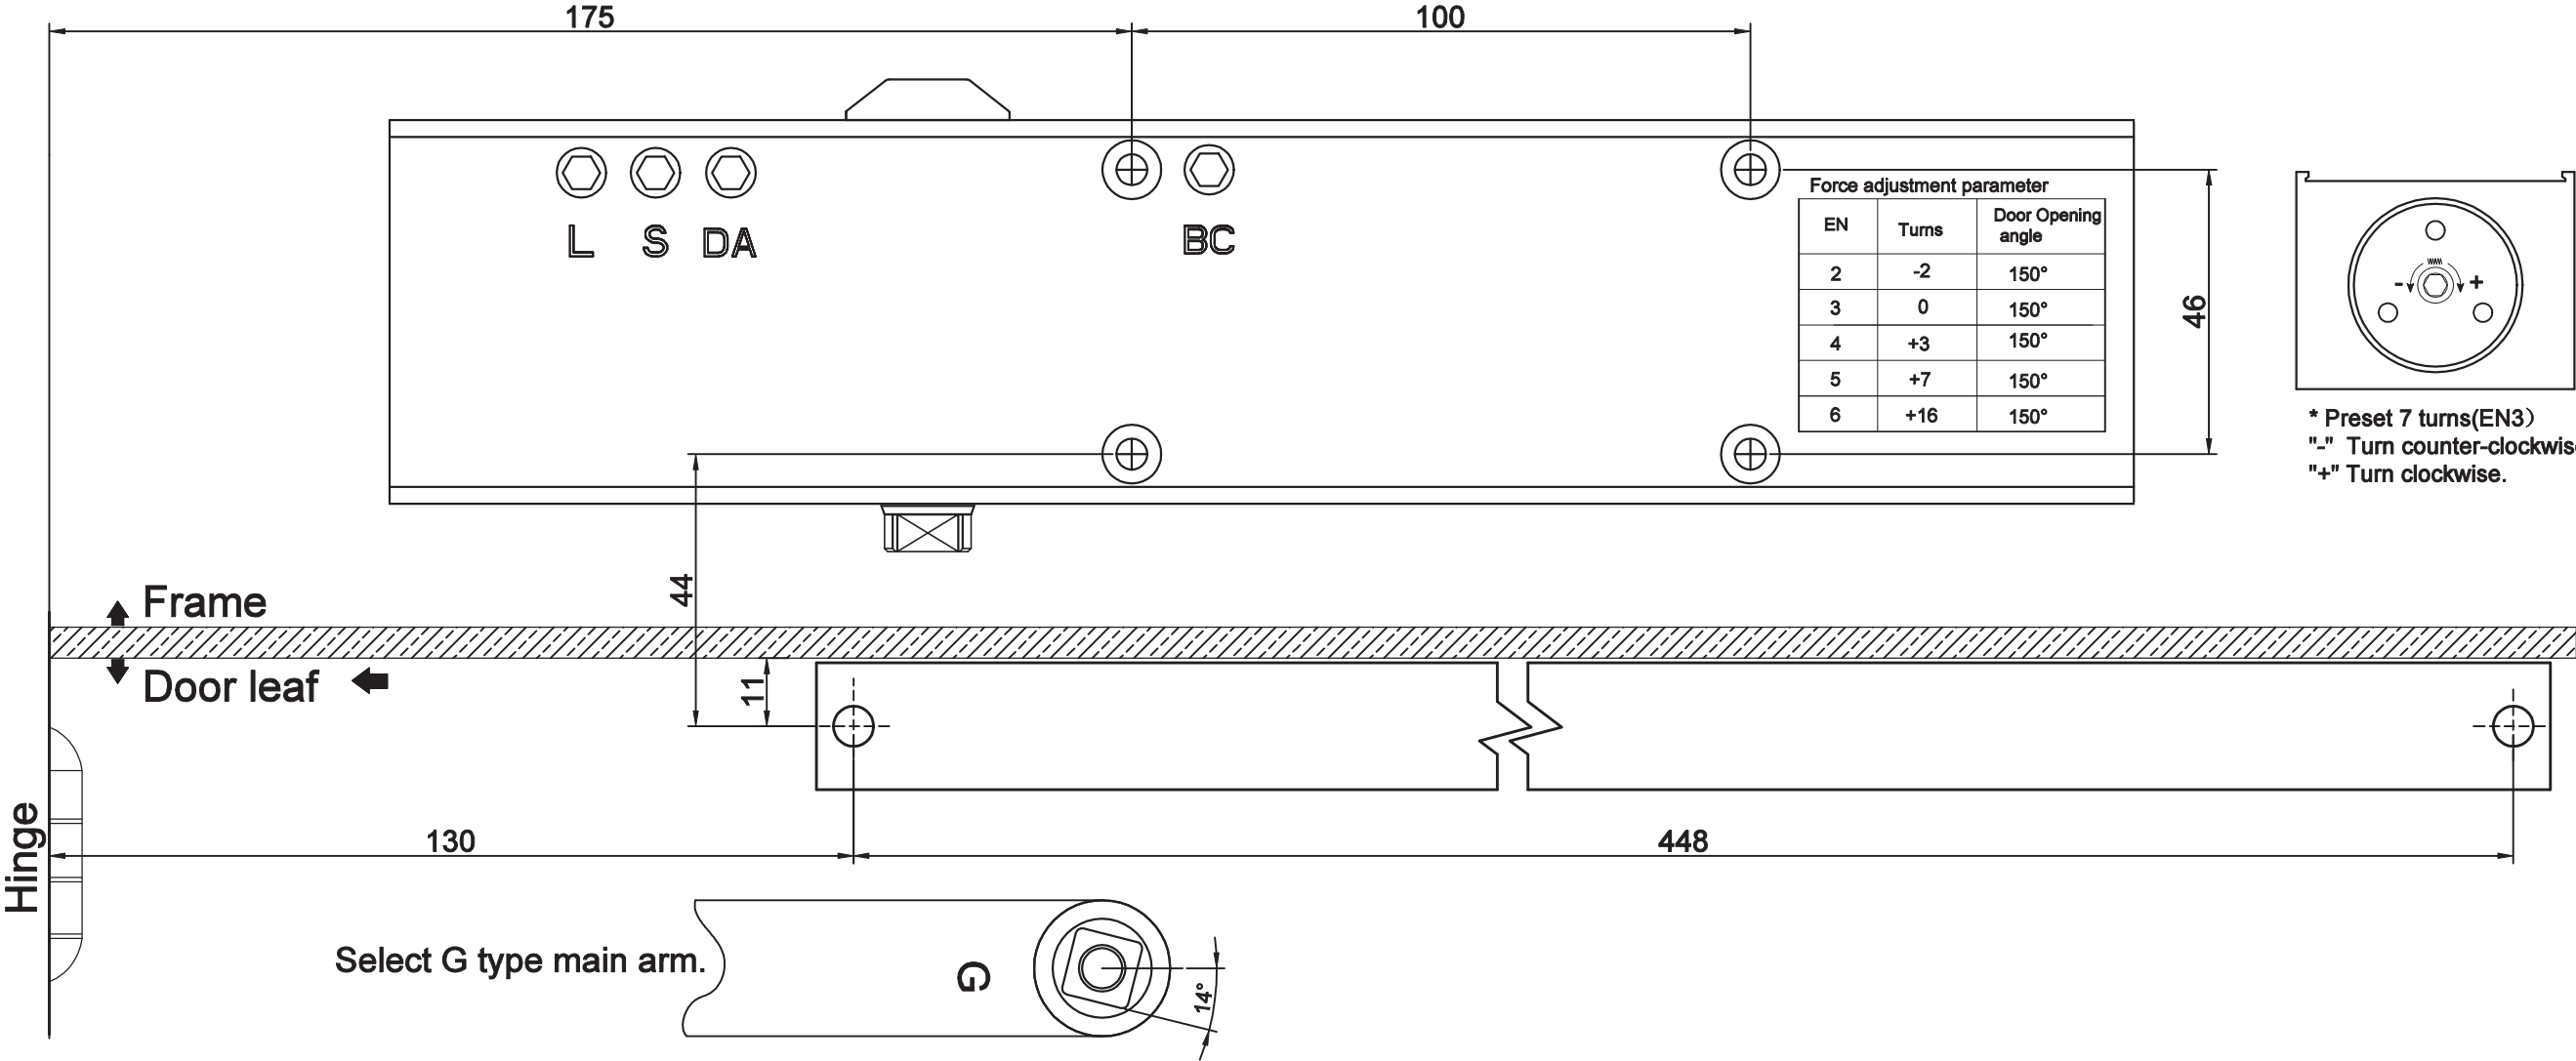

Door mount | Push side |Type G
Right hand door illustrated
Same dimensions apply to left hand door.

DC1500BCDA (MNC9000) G CAM ACTION
DOOR CLOSER INSTALLATION INSTRUCTION

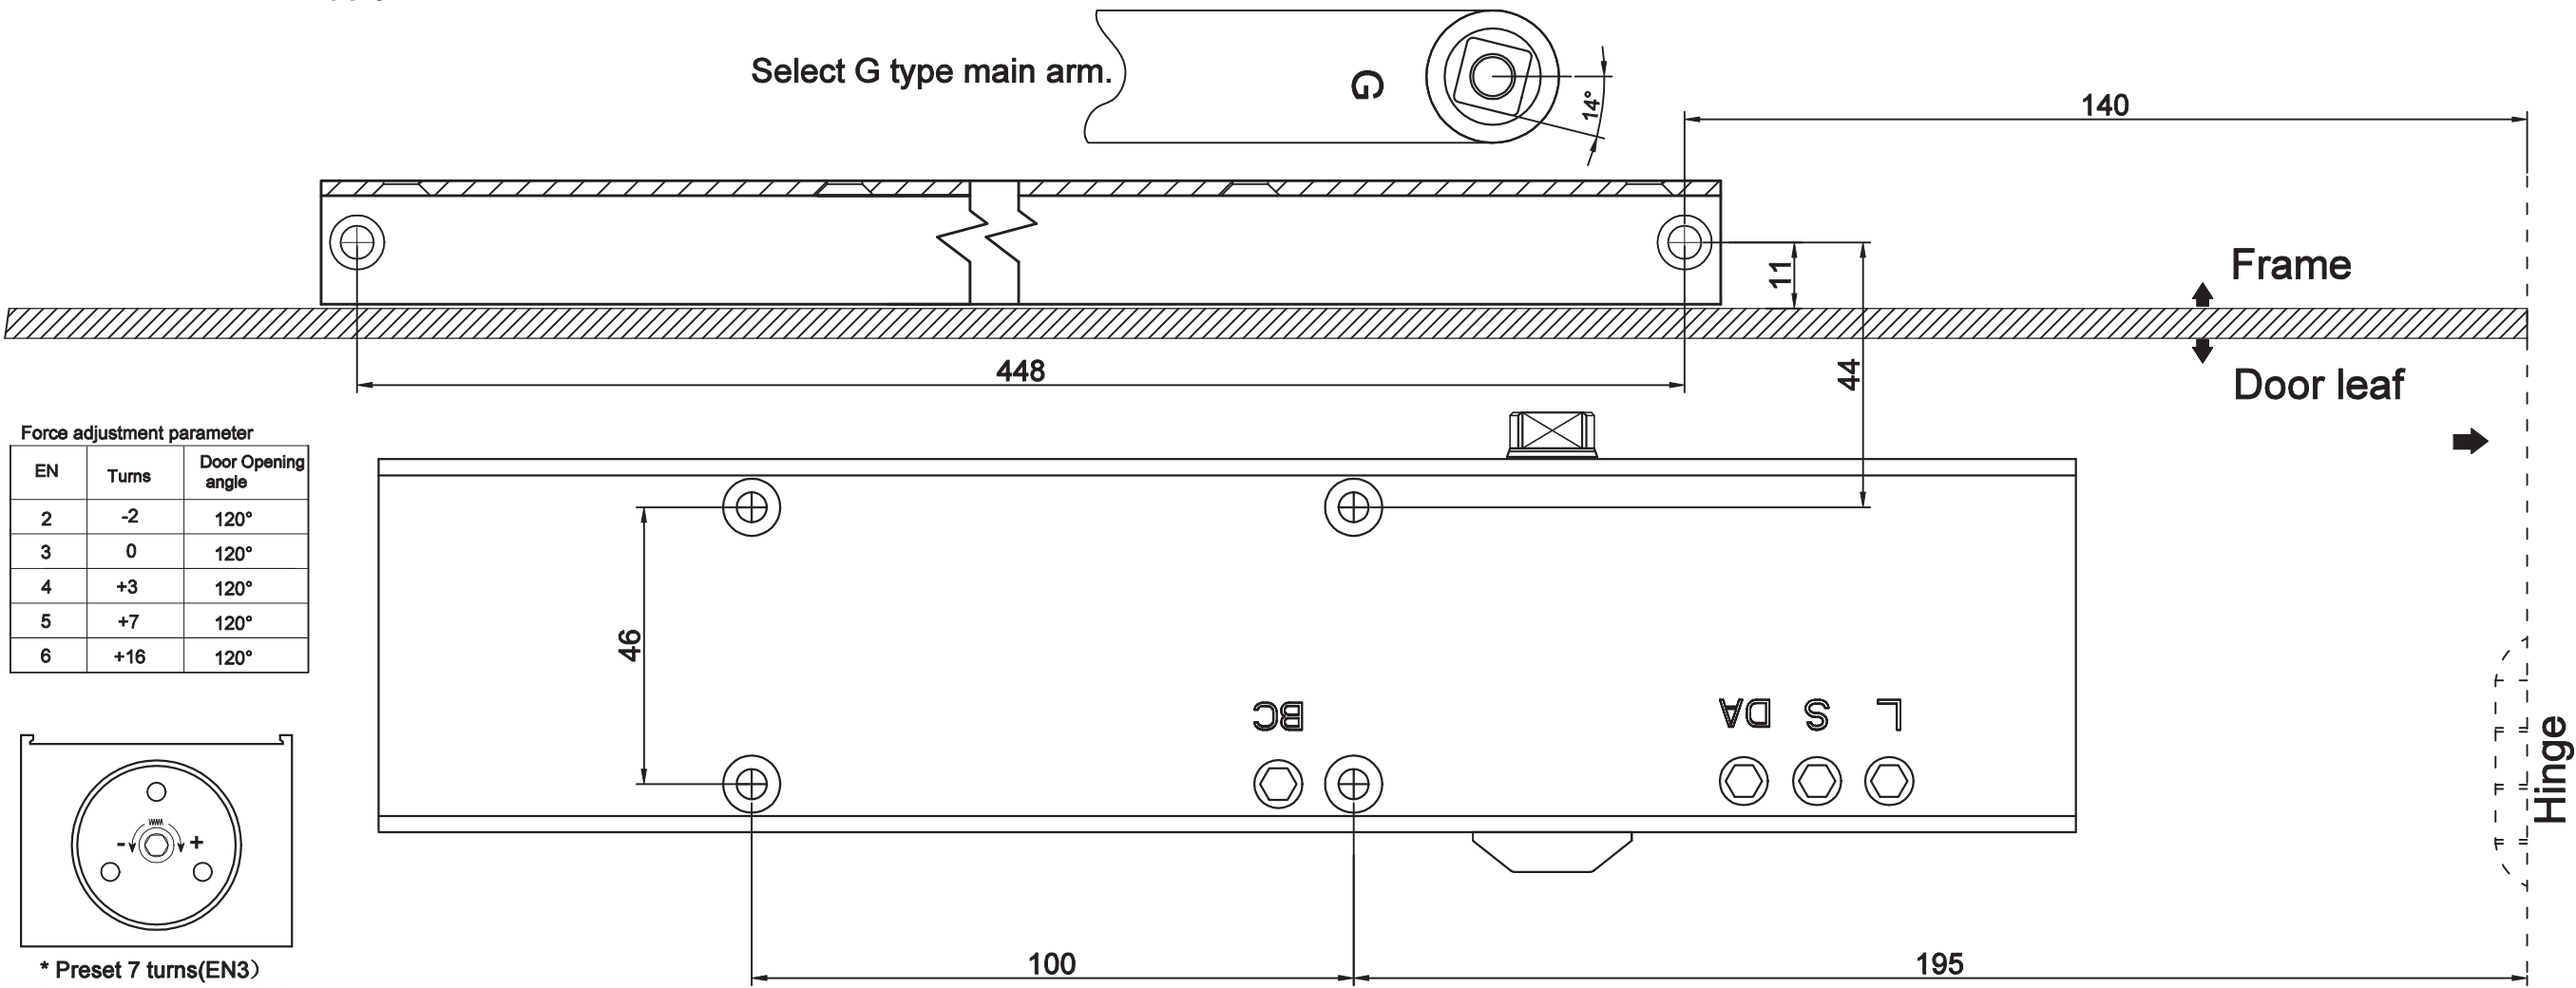

1

Install the door closer body on the door leaf. Note: The speed control valve should be positioned near the hinge side.

2

Install the door closer guide rail on the door frame.

3

Connecting screw

Pinion Cap

45°

1. Fully close the closing speed (1) control valve by turning it clockwise.
2. Use an open-end wrench to preload the bottom shaft by 45° toward hinge and hold it in position.
3. Put the main arm onto the upper shaft in a direction approximately parallel to the door, then secure with provided screw.
4. Rotate the main arm to connect with slider inside guide rail and lock in place with final tightening.

4

Fast

Slow

Speed Adjustment.

Weak

Strong

Latch speed

Closing speed

DA speed

Backcheck

L S DA BC

120°

15°

0°

1

2

BC

DA

WARNING: Do not back valve out of closer body. Otherwise, it will cause oil leakage.