

8624 CAM ACTION DOOR CLOSER

WITH SLIDE ARM - EN POWER 2 - 4



1. Slide Arm

Aluminium slide arm track. Has pre-drilled holes to suit pull or push side mounting.

2. Hold Open

Adjustable hold open feature. Can be positioned according to door angle requirement. Easily removed for fire doors.

3. Closer Arm

Solid steel arm suits both inward and outward direction doors. Designed for use on left or right hung doors.

4. Magnetic Cover

Magnetic cover trim plate for ease of use and clean aesthetic.

5. Hydraulic Fluid

Adjustable valves to control the closing speed, latching speed, backcheck, and delayed action.

6. EN Power 2-4

Spring adjustment to set door power to suit environmental conditions.

7. Cam Action

Roller and cam mechanism aids ease of use while maintaining power.

8. Installation

Can fit into 30mm gap between top of door and ceiling. Packer available for clearing 18mm architrave on pull side of door.

Available Finishes

Stainless Steel




Matt Black



10 YEAR MECHANICAL WARRANTY

HIGH DURABILITY

500K CYCLES

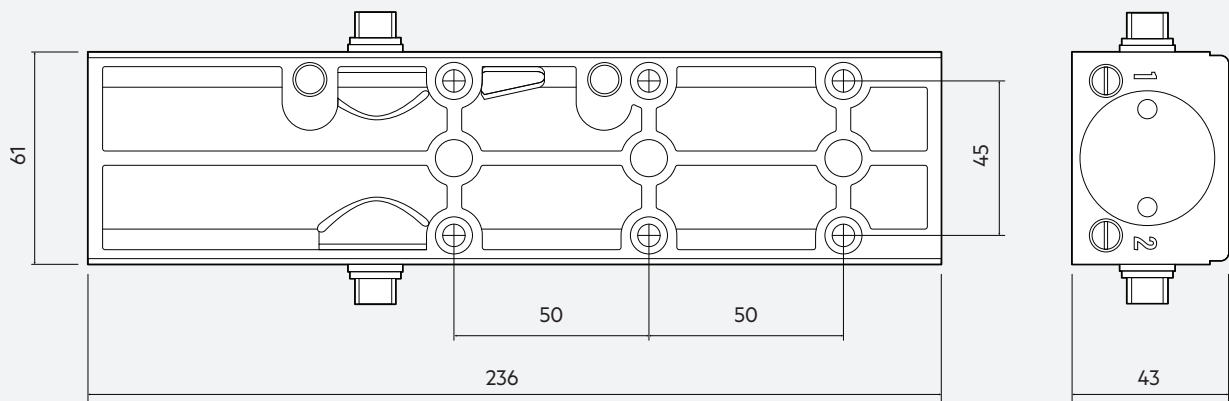

Product Details

Code	Finish
MNC8624CA	Satin Chrome
MNC8624CA-BLK	Matt Black

Accessories (page 24 - 25)	Description
MNC8000DP	Drop plate
MNCD002	Double door selector
MNC8626PR	Packer - Satin Chrome
MNC8626PR-BLK	Packer - Matt Black

Model	Power	Fire Rated	Adjustable Closing Speed	Adjustable Latching Speed	Backcheck	Delayed Action	Opening Angle Push	Opening Angle Pull	Max. Door Weight (kg)	Max. Door Width (mm)
MNC8624CA	EN2-4		✓	✓			105°	120°	25-85	750-1100